


Specification


| NO. | | | | |
|---|--|---|--|--|
| Output | Model | KS65DU | | |
| | DC Voltage | 12V | | |
| | Rated current | 5.0A | | |
| | Output current range | 0~5.0A | | |
| | Rated power(Max) | 60W | | |
| | Ripple and noise(Max) | 120mVp-p | | |
| | Voltage Tolerance Note.3 | ±5% | | |
| | Line Regulation Note.4 | ±1% | | |
| | Load Regulation | ±5% | | |
| Set up, RiseTime Note.6 | | 1000ms, 30ms, 50ms/230VAC 1500ms, 30ms, 15ms/115VAC (full load) | | |
| Input | Voltage Range Note.7 | 85~264VAC | | |
| | Frequency Range | 47~63Hz | | |
| | Efficiency (Typical values) | 88.0% | | |
| | PF | 0.6-0.7 | | |
| | AC current | MAX 2.0A/115VAC; 230VAC | | |
| | Inrush current (Max) | 35A/115VAC 65A/230VAC | | |
| Leakage Current (Max) | | 0.75mA/240VAC | | |
| Protection | Short circuit protection | The power supply shall not be damaged by short between DC output and DC ground The power supply shall automatically restart when short to ground are removed | | |
| | Overvoltage | 110%~140% Rated output voltage Protection type: Diode clamp, output short circuit | | |
| | Overcurrent | Protection type: Hiccup Mode; 6.5A-8.0A overcurrent protection at 100-240VAC Input voltage | | |
| Environment | Operating temperature | -30~+45°C | | |
| | Operating Humidity | 20~90%RH, (Non-condensing) | | |
| | Storage temperature, Hum | -40~+85°C, 10~95%RH | | |
| | TEMP.Coefficient | ±0.03%/°C (0~50°C) | | |
| | Shock | 10~500Hz, 2G 10 Minute/Period, Period:60 minute, along X、Y、Z | | |
| Safety Standards electromagnetic compatibility | Safety Standards | KC K60950-1, RoHS, UL62368, UL60950-1, TUV-GS CE IEC/EN62368-1, J62368 | | |
| | Pressure | I/P-O/P: 4242VDC, I/P-FG: 2121VDC | | |
| | Insulation resistance | I/P-O/P, I/P-FG: 100M Ohms/500VDC/25°C/70%RH | | |
| | EMC Emission | Parameter | Standard | Test Level/Note |
| | | Conducted emission | EN55032(CISPR32),FCC PART 15/CISPR22 CAN ICES-3(B)/NMB-3(B),CNS13438,GB17625.1 | Class B |
| | | Radiated emission | EN55032(CISPR32),FCC PART 15/CISPR22 CAN ICES-3(B)/NMB-3(B),CNS13438,GB17625.1 | Class B |
| | | Harmonic current | EN61000-3-2,GB9254 | Class A |
| | | Voltage flicker | EN61000-3-3 | |
| | EMC immunity | Parameter | Standard | Test Level/Note |
| | | ESD | EN61000-4-2 | Level 3, 8KV air; Level 2, 4KV contact |
| | | RF field susceptibility | EN61000-4-3 | Level 2,3V/m |
| | | EFT bursts | EN61000-4-4 | Level 2,1KV |
| | | Surge susceptibility | EN61000-4-5 | Level 4,2KV/Line-line,4KV/Line-FG |
| | | Conducted susceptibility | EN61000-4-6 | Level 2,3V |
| | | Magnetic field immunity | EN61000-4-8 | Level 2,3A/m |
| Other | Voltage dips, interruption | EN61000-4-11 | | |
| | MTBF | ≥50Khrs MIL-HDBK-217F(25°C) | | |
| | Size | 114*51*31mm(L*W*H) / 108*50*31mm(L*W*H) | | |
| | Package | 50PCS/CARTON | | |
| DC Plug | | 5.5*2.5*11mm | | |
| Note | 1. Unless otherwise specified, all specifications are measured at 230VAC, rated load, and 25°C 70% RH. 2. DC voltage measurement method: measure at the socket terminal point under 50% load condition. 3. Ripple and noise measurement method: use a 12" twisted pair cable, and the terminal should be connected with 0.1uf and 47uf capacitors in parallel, and measure at 20MHz bandwidth. 4. Accuracy: Includes setting error, linear adjustment rate and load adjustment rate. 5. Linear adjustment rate measurement method: from low voltage to high voltage test under rated load. 6. Load regulation measurement method: 10%-100% from the rated load. | | | |

KSPower 60W AC/DC ADAPTER KS65DU Series Power Adapter

■减额曲线

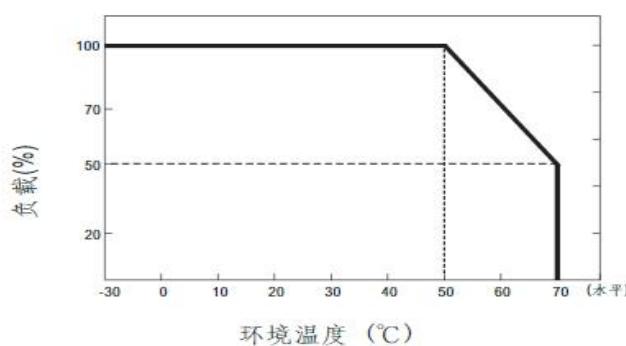


■静态特性曲线

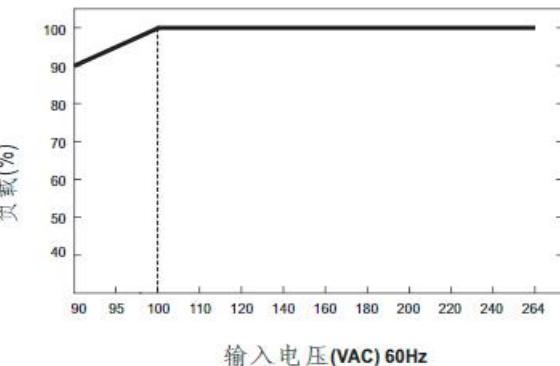



■机构尺寸

Desktop type(桌面式)

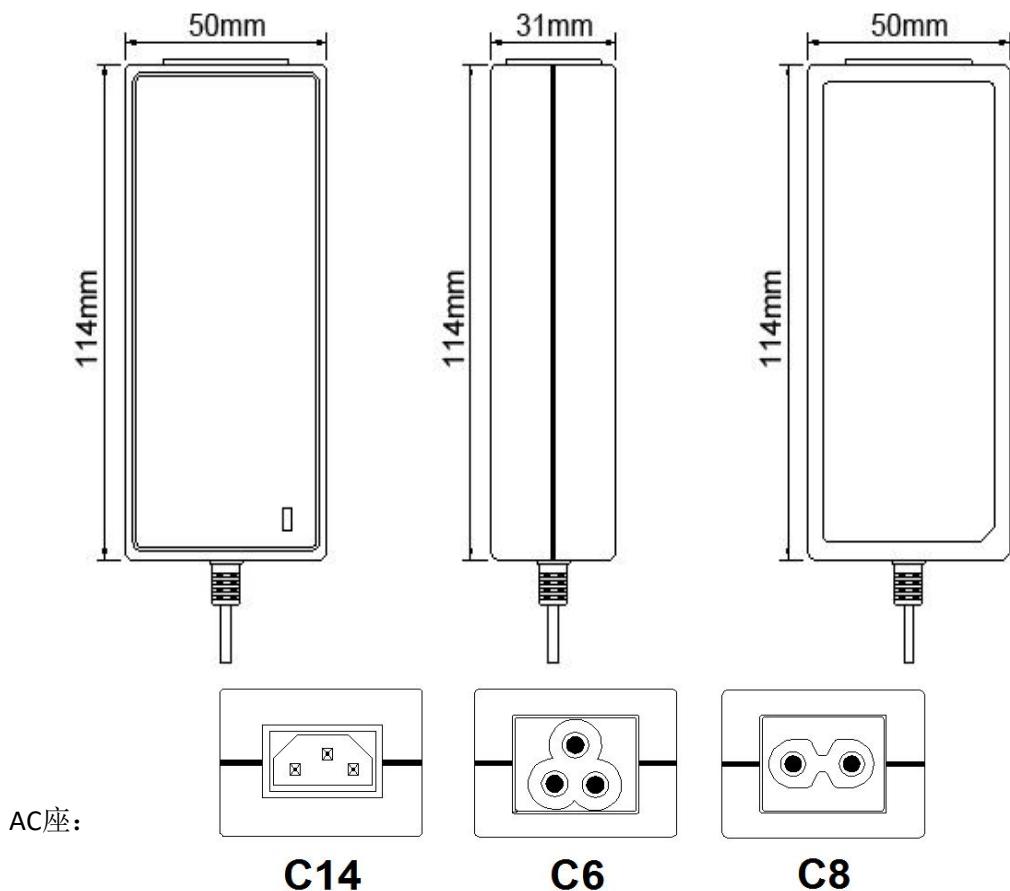

Wall mount type(插墙式)



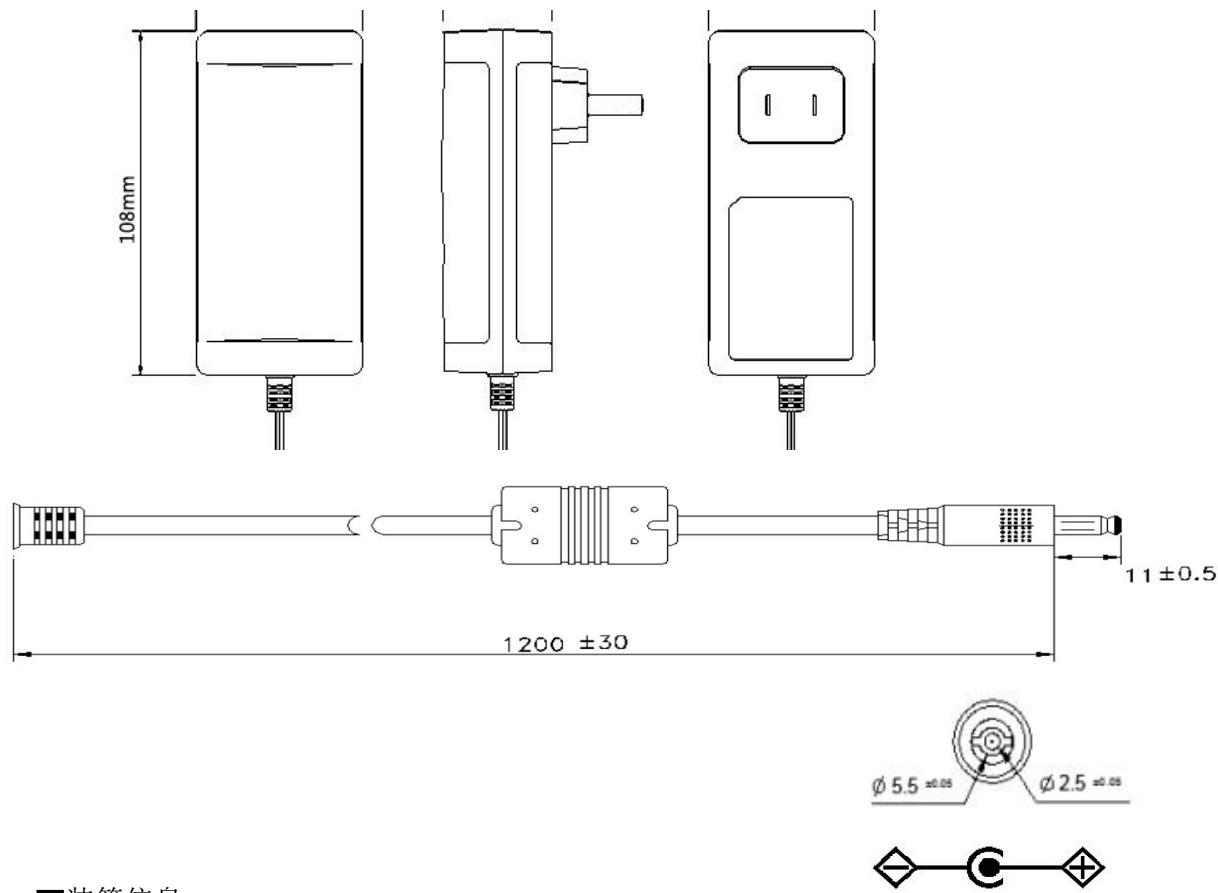

■装箱信息

重量/weight: 0.26kg/PCS (not including AC cable) 极性: 内正外负

外箱/outer package: 45.5*37*17.5CM

Polarity: Center Positive

包装/package: 50PCS/CARTON